

Características

Modelo	RS-200W-BB
Aplicación	Reflectores RS
Material	Fe+Al
Terminado	Negro
Pantalla	Cristal
Indice de protección	IP65
Base	Soporte de Fijación
Dimensiones mm	418*334*42
Lúmenes	18000lm
Temperatura	6500k

Parámetros Eléctricos

Tensión Nominal [V~]	100-240V~
Consumo de Potencia [W]	200W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	2.00A
Temperatura de Operación	0-40 °C

Beneficios

Garantía	2 Años de Garantía
Certificación	NOM ANCE





CIE Colorimetric Parameters

CCT: Tc=6614K (duv=0.00317)

CRI: Ra= 73.0, avgR(1~14)= 62.9, avgR(1~15)= 63.1

CIE1931 CHROMATICITY DIAGRAM

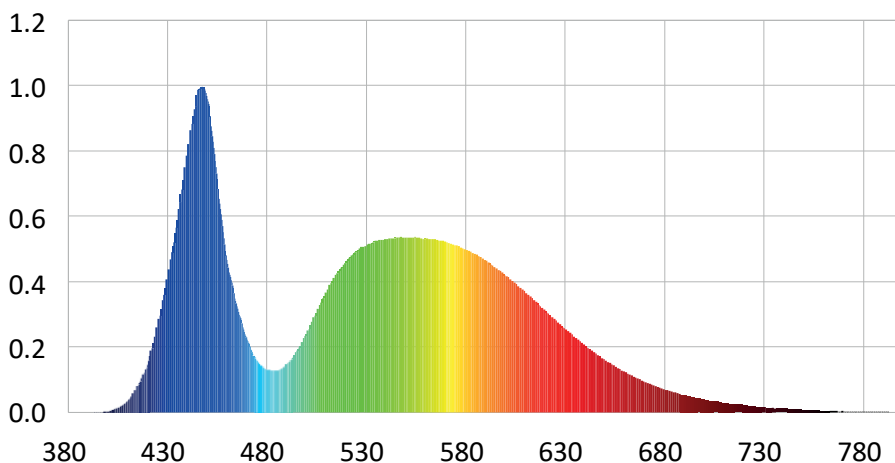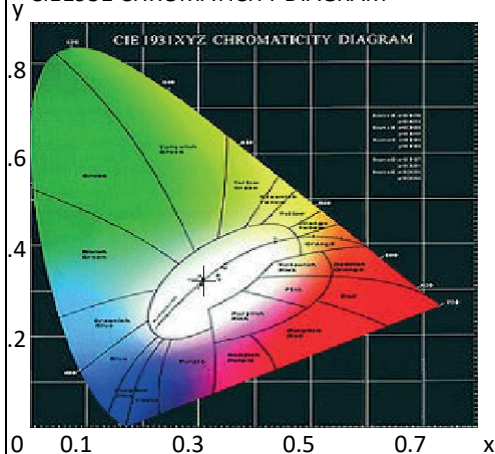


Photometric Parameters

Luminous Flux: 18030.67 lm	Efficiency: 92.70 lm/W	Radiant Power: 57.031 W
E E I: 0.15	E nergy E fficiency C lass :	A+ (E U 8 74 - 201 2)
Pupil Flux: 31614.47 Plm	Pupil Lumens Per Watt: 162.54 Plm/W	Pupil Factor (Kp): 1.753


Electric Parameters

Voltage: 127.20V	Current: 1.6650A	Power: 194.50W
Power Factor: 0.9190	Frequency: 60.00Hz	



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

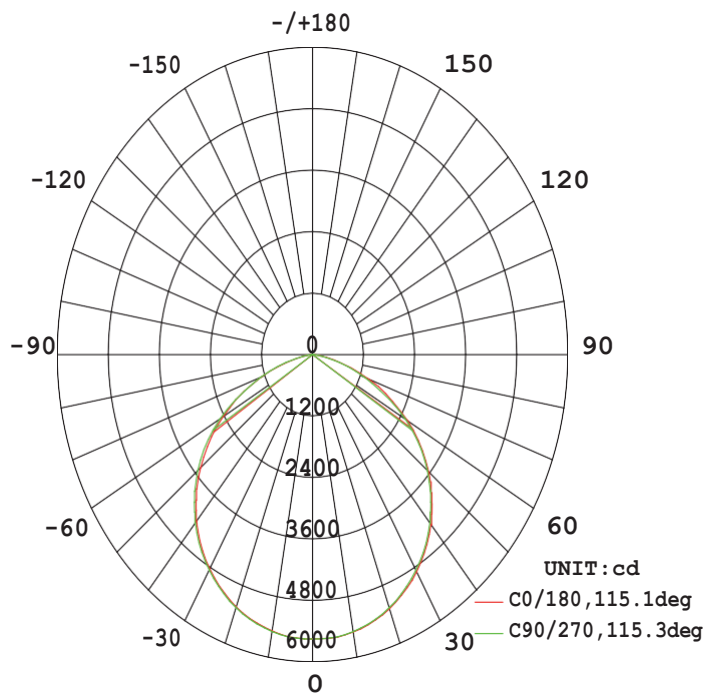

AVERAGE BEAM ANGLE (50%) : 115.2 DEG

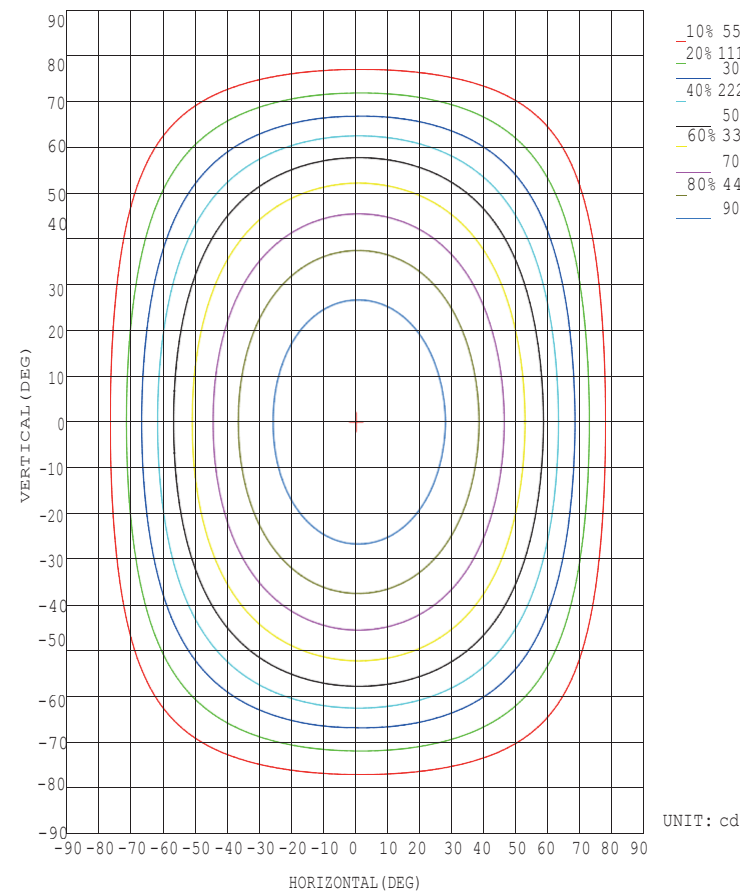

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

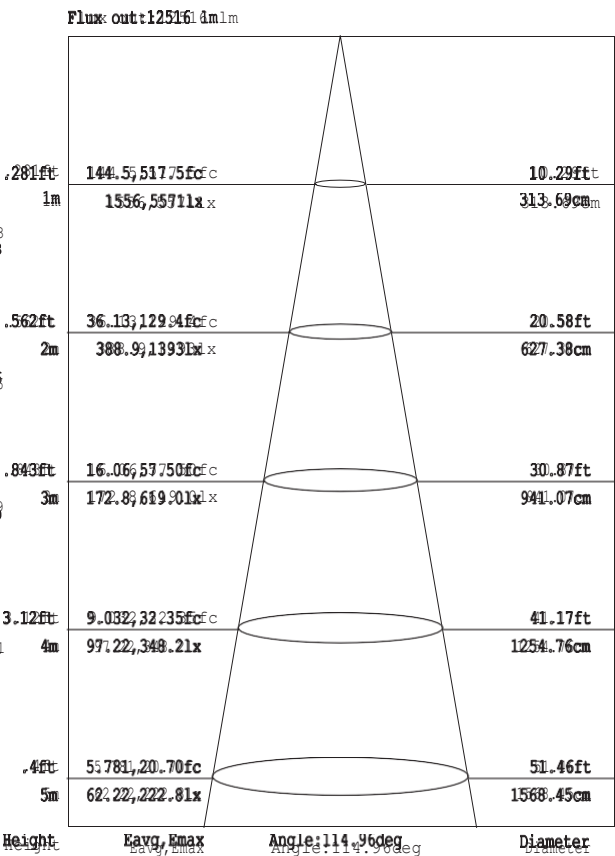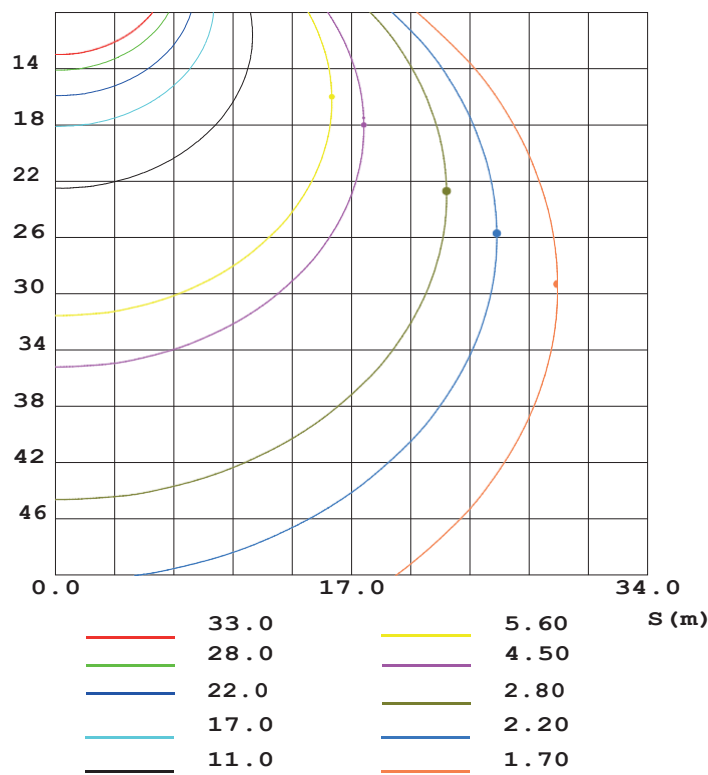

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.