


Características	
Modelo	RZH-200W
Aplicación	Reflectores RZH
Material	Fe+Al
Terminado	Negro
Pantalla	Cristal
Indice de protección	IP65
Base	Soporte de Fijación
Dimensiones mm	450*350*108
Lúmenes	20000Lm
Temperatura	6500k
Parametros Eléctricos	
Tensión Nominal [V~]	85-305V~
Consumo de Potencia [W]	200W
Frecuencia Nominal [Hz]	50/60Hz
Consumo de Corriente [A]	2.35A
Temperatura de Operación	0-40 °C
Beneficios	
Garantía	3 Años de Garantía
Certificación	NOM ANCE



CIE Colorimetric Parameters

CCT: Tc=6318K (duv=0.00032)

CRI: Ra= 82.6, avgR(1~14)= 75.1, avgR(1~15)= 75.2

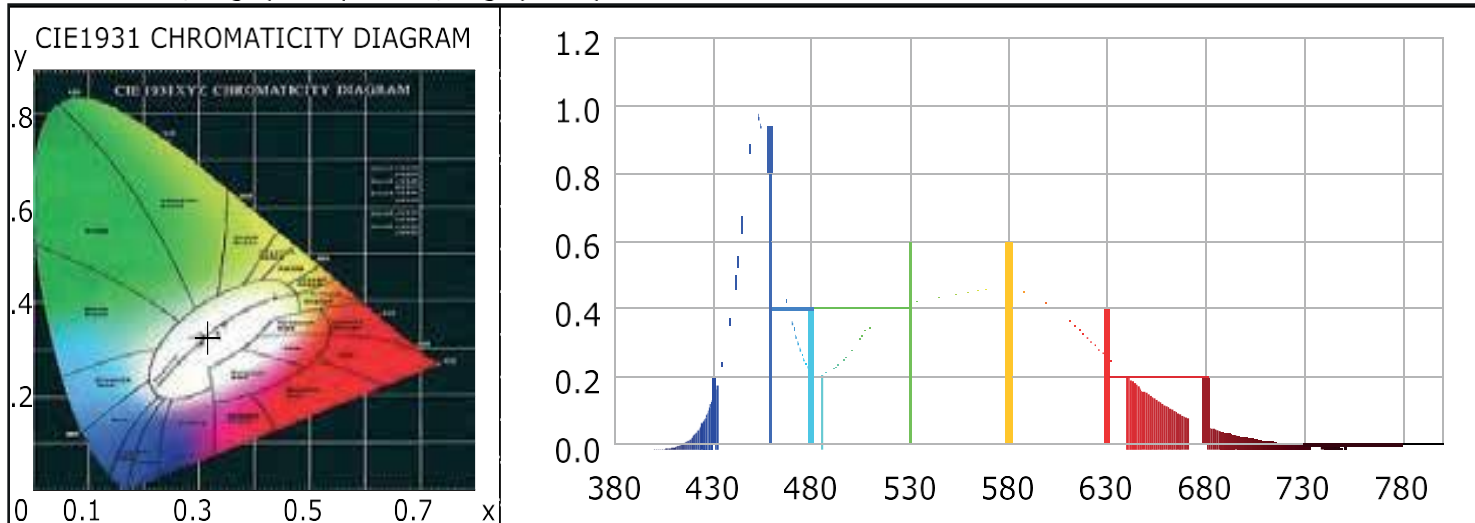


Photometric Parameters

Luminous Flux: 21558.04 lm Efficiency: 104.09 lm/W Radiant Power: 69.085 W
 EEI: 0.13 Energy Efficiency Class: A+ (EU 874-2012)
 Pupil Flux: 39797.17 Plm Pupil Lumens Per Watt: 192.16 Plm/W Pupil Factor (Kp): 1.846


Electric Parameters

Voltage: 126.70V Current: 1.7060A Power: 207.10W
 Power Factor: 0.9580 Frequency: 60.00Hz


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

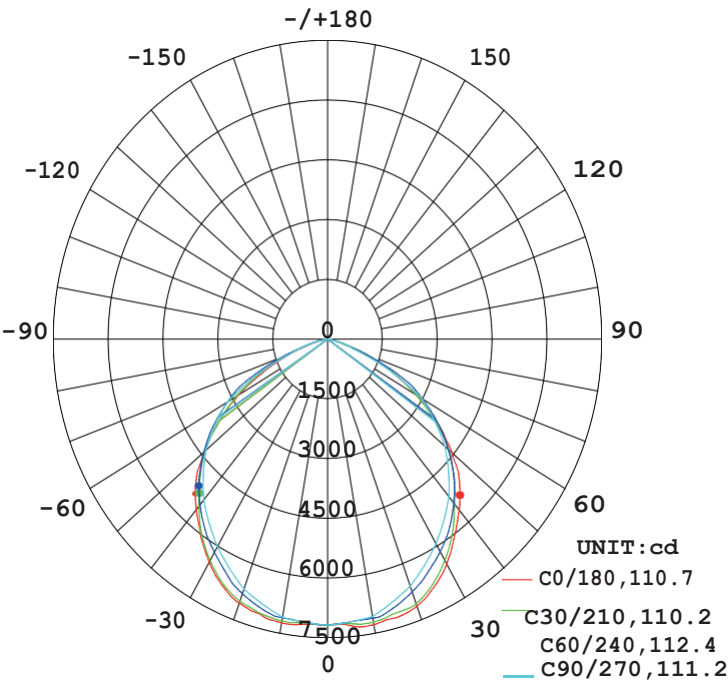


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

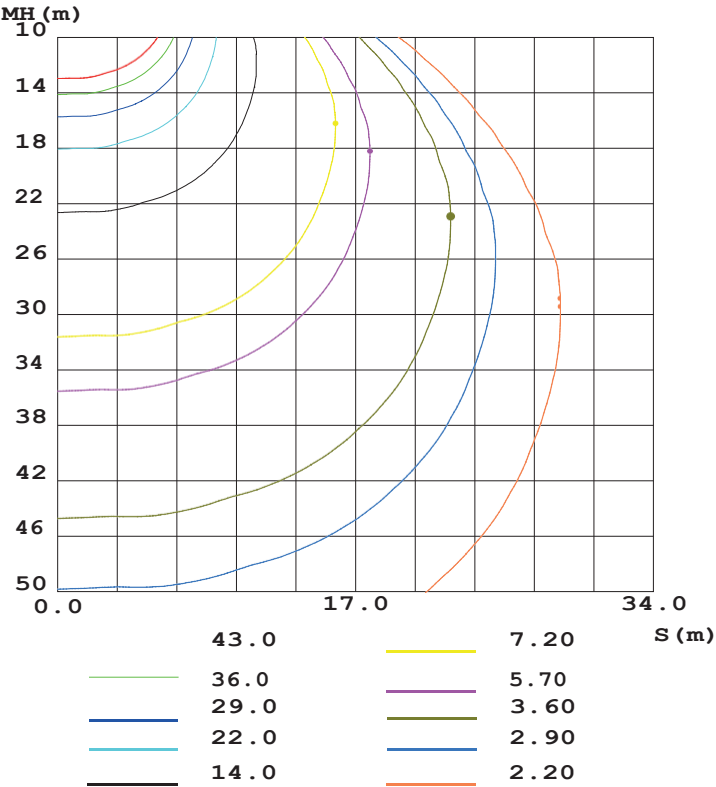

AVERAGE BEAM ANGLE (50%) :111.1 DEG

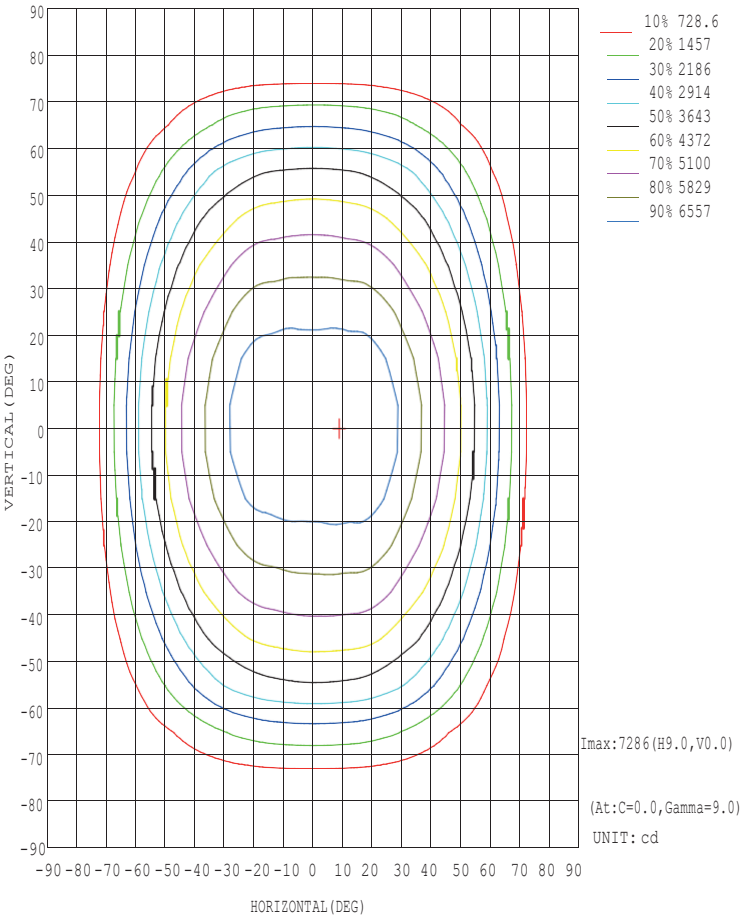

Flux out:15061 lm

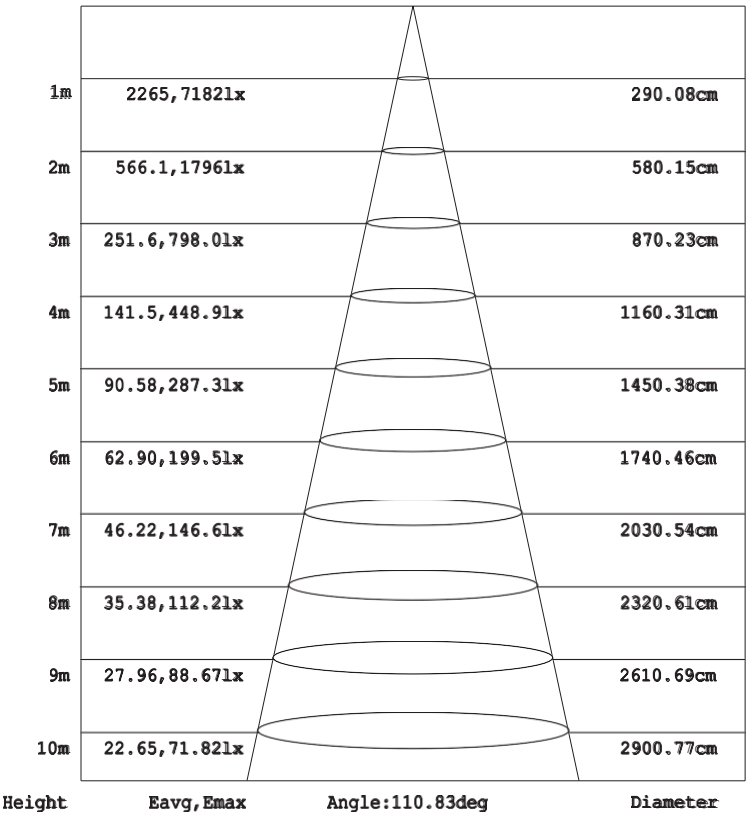

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.