


PRODUCT NAME: Scepter 1-Light Wall Sconce
ITEM NUMBER: E32770

Please consult your electrician for hanging fixture and wiring.

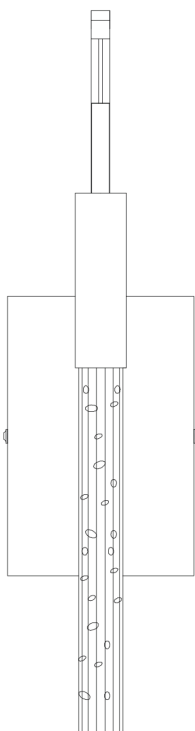

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:


Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.



WARNING: Wires need to be connected to driver found in canopy and should not connect directly to power source or a short might occur.

1-7.5W LED

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

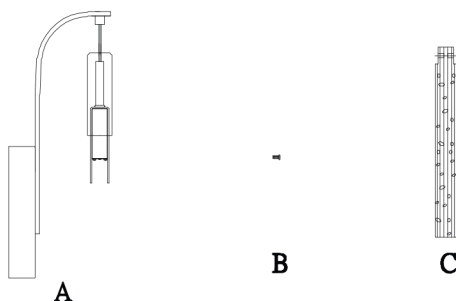


Locate all hardware & components before discarding packaging

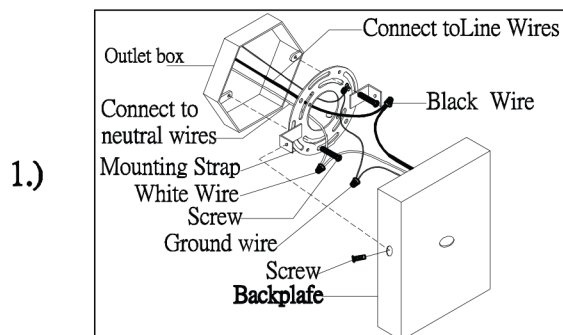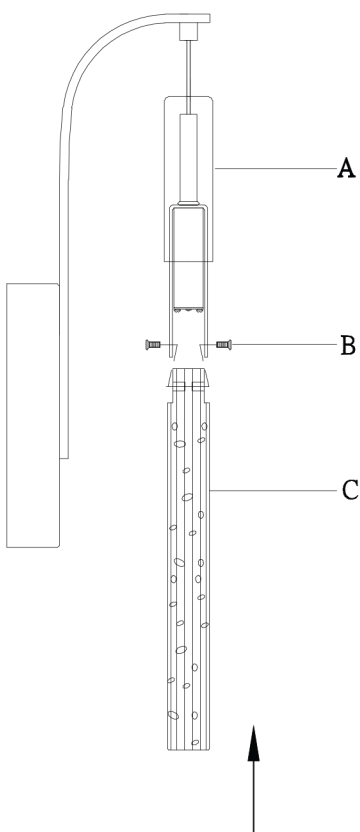

Step.1: Remove mounting bracket from fixture and install to electrical box. Then wire fixture to wires in outlet box. Copper wire is for Ground. Attach back plate to ceiling and tighten screws on the sides until fixture meets wall.

2.)

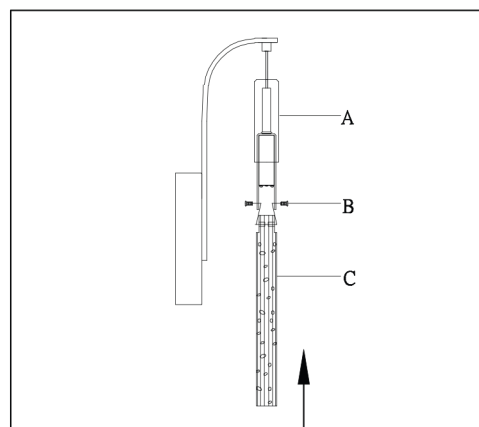


Step.2: Attach Glass (C) using set screws (B).


Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.

**Pendant
Wires**

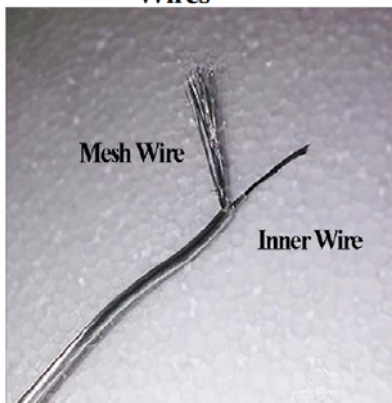

**Driver
Wires**

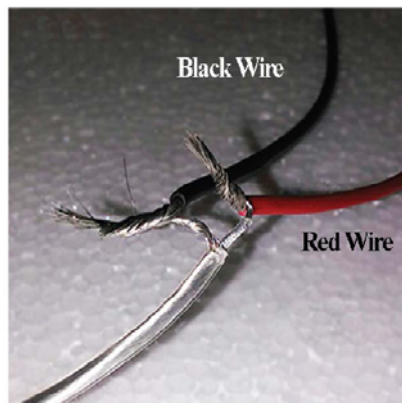

Pendant	Driver
Inner Wire (+)	Driver Red (+)
Outer Mesh (-)	Driver Black (-)

Step 4. If wires are cut in the process of adjusting the height, please note the pendants consist of an outer mesh (ground) and inner (Live) wire that must be seperated before rejoining to driver.